



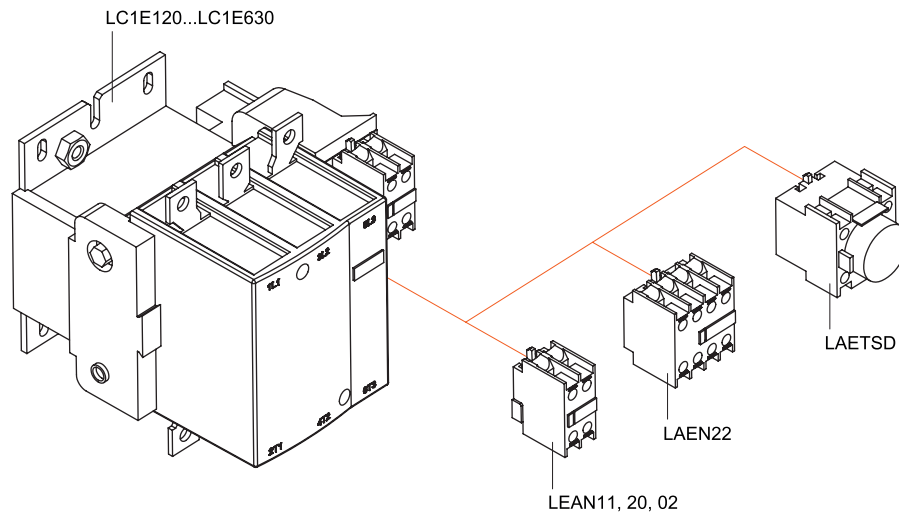


Габаритные размеры, мм

Контакторы LC1E 9-32 A

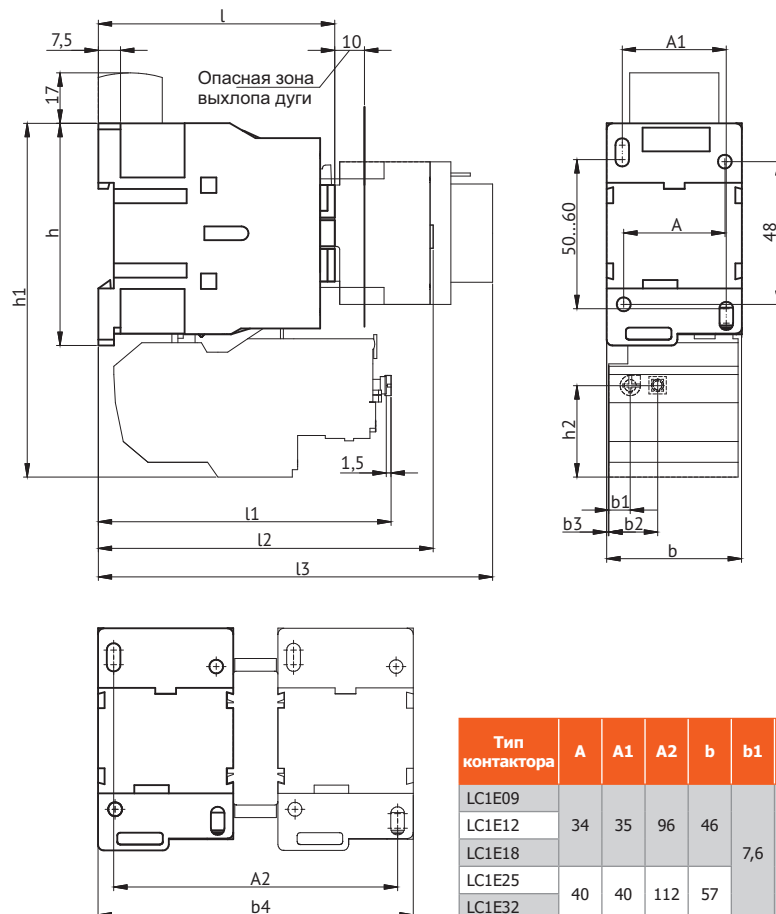


Тип контактора	A	A1	A2	b	b1	b2	b3	b4	h	h1	h2	l	l1	l2	l3	Винты для крепления на панели
LC1E09							0,5									М4 2шт.
LC1E12	34	35	96	46				107	75	120		81	98,5	114	136	
LC1E18					7,6	16,8	0				31	86	99	119	140	
LC1E25							10,5	129	84	129		94	108,5	127	147	
LC1E32	40	40	112	57			8,5					100	110,5	132	154	

Контакторы LC1E 40-95 A

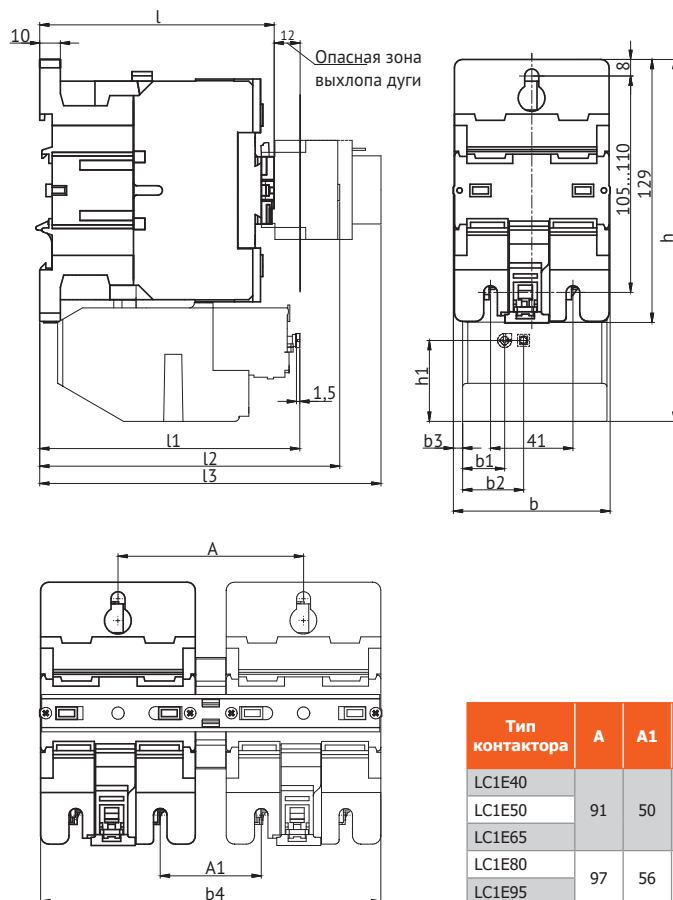


Тип контактора	A	A1	b	b1	b2	b3	b4	h	h1	l	l1	l2	l3	Винты для крепления на панели
LC1E40	91	50	77	20,4	29,6	5	167	176	39,2	115	126	147	169	М6 3шт.
LC1E50														
LC1E65														
LC1E80	97	56	86			8,5	182	180		123	131,5	155	177	
LC1E95														

Контакторы LC1E 120-300 A

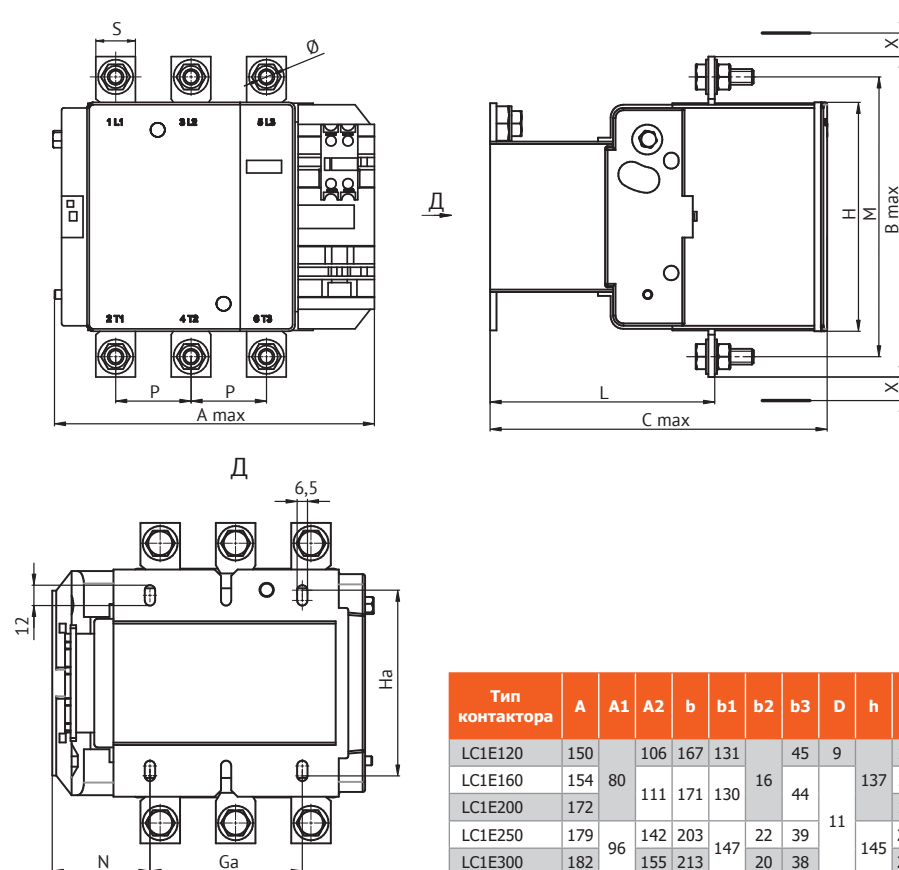


Тип контактора	A	A1	A2	b	b1	b2	b3	D	h	h1	h2	l	l1	P	Q	Q1	S	Винты для крепление на панели
LC1E120	150	80	106	167	131	16	45	9	137	171	124	171	107	40	29	58	20	М6 4шт.
LC1E160	154		111	171	130					174	127	181	113,5		31	60		
LC1E200	172									197					22	53		
LC1E250	179	96	142	203	147	22	39	11	145	205	147	213	142	48	39	68		
LC1E300	182		155	213		20	38			207	158	219	146		43	74		

Контакторы LC1E 400-500 А

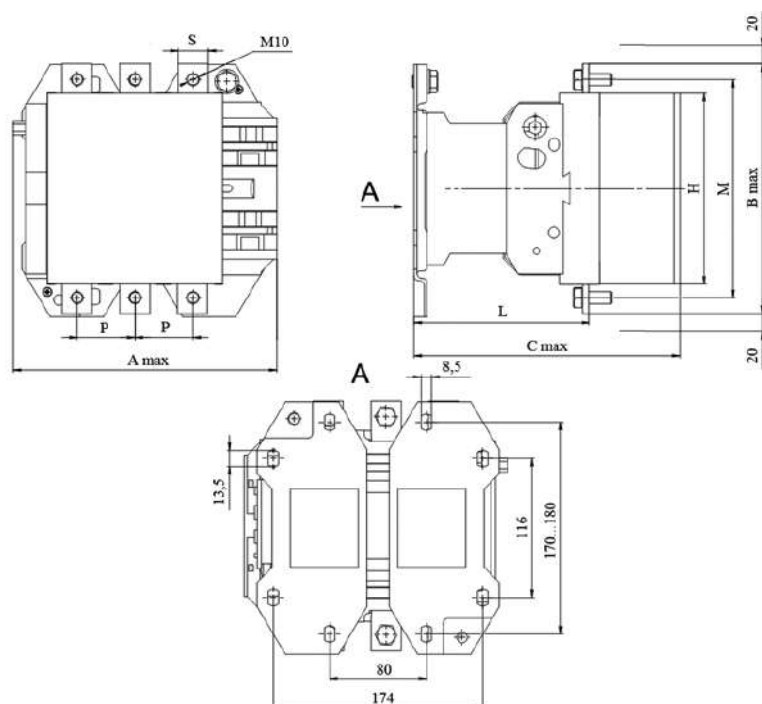

Тип контактора	A	b	b1	b2	h	h1	l	l1	P	Q	Q1	S	Винты для крепление на панели
LC1E400	181	213	151	19,5	206	158	220	145	48	43	74	25	М8 4шт.
LC1E500	208	233	169	39,5	238	172	233	146	55	46	77	30	

Контакторы LC1E 630, 800 А

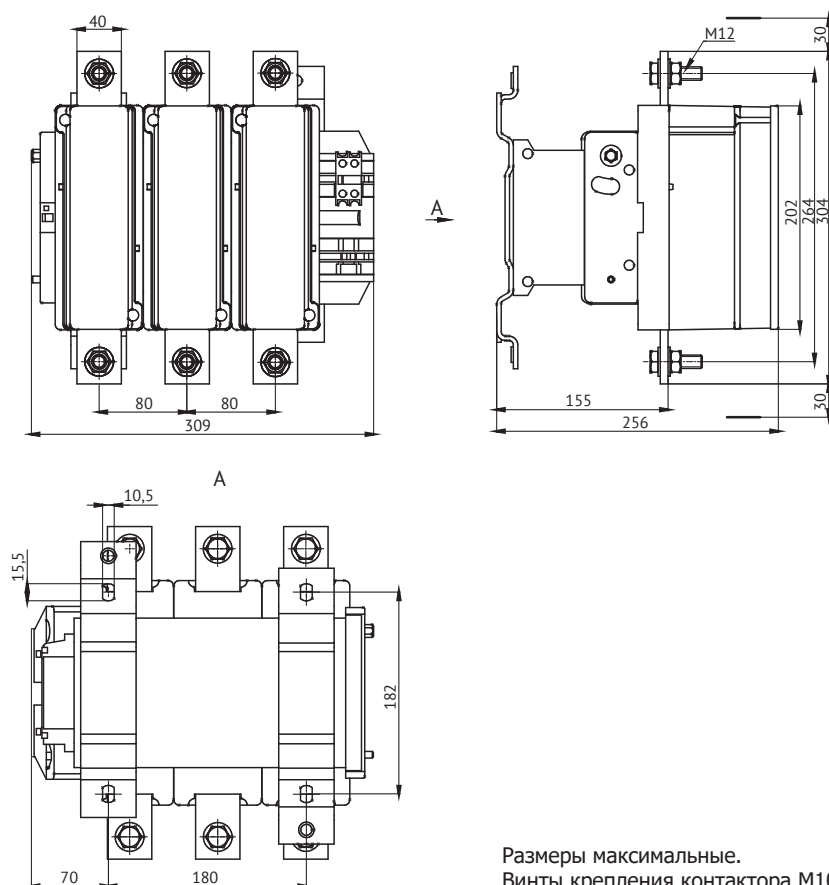

Размеры максимальные.
Винты крепления контактора М10 – 4 шт.